

SELF-CLOSING DEVICE





SERIES SILENTO PORTA 100

▶ PRODUCT SPECIFICATIONS



Weights of up to 160 kg can be braked gently with this unit. Developed for sliding doors, this system can also be used in other areas. The extra-long stroke results in a homogeneous closing pattern.


▶ APPLICATION AREAS

 Door	
 Sliding door	●
 Drawer	
 Hinge	

▶ SERIES CHARACTERISTICS

Series	Stroke [mm]	Medium	Operating direction
Silento Porta 100	100.0	Fluid	Inward closing

▶ TECHNICAL DRAWING

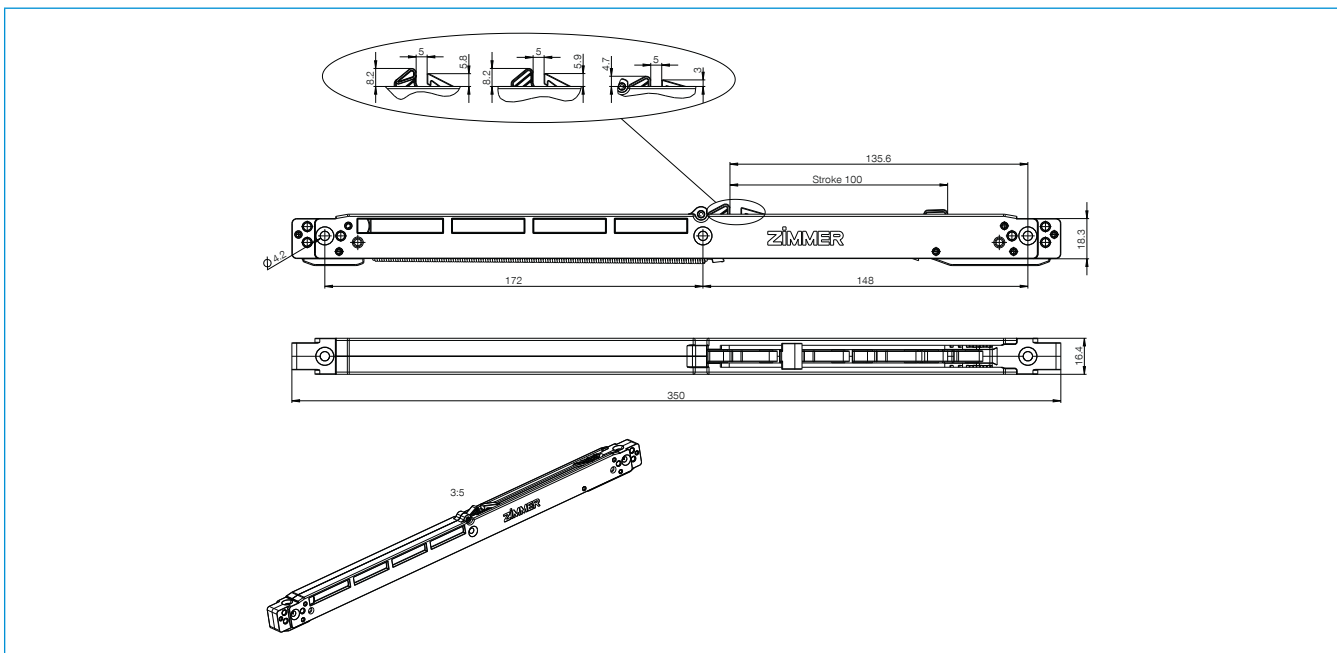

► TECHNICAL DATA

Order no.	E100-08-062	E100-08-065	E100-08-068	E100-08-151
Mass to be braked [kg]	160.0	120.0	100.0	160
Operating direction	Inward closing	Inward closing	Inward closing	Inward closing
Free-run	No	No	No	No
Free-run length [mm]	0.0	0.0	0.0	0.0
Technology	Defined Comfort	Defined Comfort	Defined Comfort	Smooth Comfort M
Total length max. [mm]	350.0	350.0	350.0	350.0
SCU housing color	Gray RAL7035	Gray RAL7035	Gray RAL7035	Gray RAL7035
SCU locking lever color	Gray RAL7035	Gray RAL7035	Gray RAL7035	Gray RAL7035
SCU Ø drilled holes [mm]	4.2	4.2	4.2	4.2
SCU width [mm]	16.4	16.4	16.4	16.4
SCU height [mm]	27.0	27.0	27.0	27.0
SCU locking lever design	Type S	Type S	Type S	Type S


CLOSING UNITS

SELF-CLOSING DEVICES

PRINCIPLE OF FUNCTION

A automatic self-closing unit will be assembled at the cabinet for example whereas the activator is assembled at the drawer itself.

The activator will be linked within the hook thus enabling the transfer of the force. The self-closing unit could however also be assembled at the drawer and the activator at the cabinet.

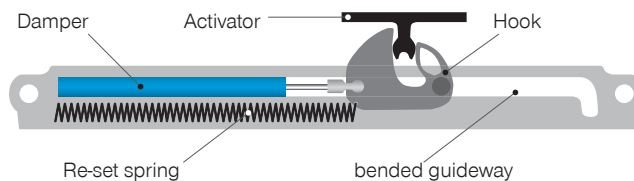

TYPES



closing inwards



closing outwards






double acting

CLOSING INWARDS SELF-CLOSING UNITS

At the closed drawer-position the activator is linked within the hook. During opening the hook will be pulled in right direction and the re-set spring will be stretched. The hook will be guided by means of two pins inside the bended guideway.


After a certain opening-movement the hook is fitting in the offset-position, this disconnecting the hook and the activator. The drawer can be opened without any further effort.

At the closing of the drawer, the hook will be activated of the activator. The return spring pulls the drawer in end position while damping.

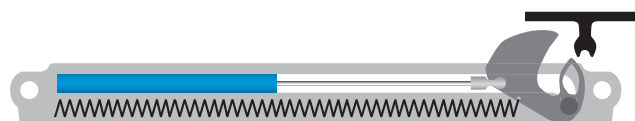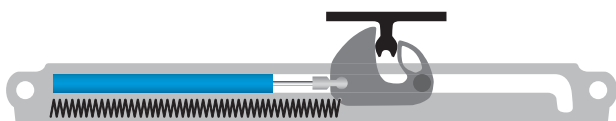

PRODUCT RANGE SELF-CLOSING (CLOSING INWARDS / DOUBLE ACTING)


- ▶ Housing length (l): 200 bis 385 mm
- ▶ Housing height (b): 18 bis 25 mm
- ▶ Housing depth (t): 10,4 bis 18 mm
- ▶ Stroke (s): 50 bis 100 mm

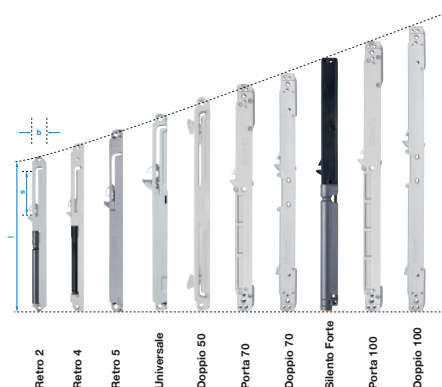


CLOSING OUTWARDS SELF-CLOSING UNITS

If there might not be sufficient space available for to assemble the activator, an outwards working self-closing unit can be used.

This system has a separate spacer which deflects the force so that the damper works on pressure.

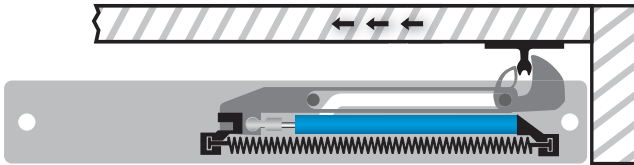

Door closed

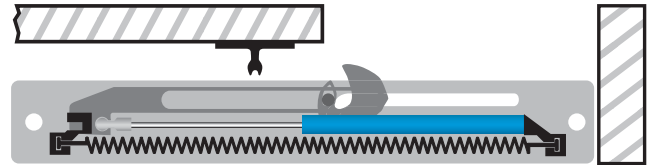


Door open


ASSEMBLY OF THE SELF-CLOSING UNITS

The above example is showing a wardrobe with two sliding-doors. The activators have to be assembled onto the sliding doors as near to the side-wall as possible in order to prevent collision with the second door resp. the cabinet.

Use an outward closing unit.

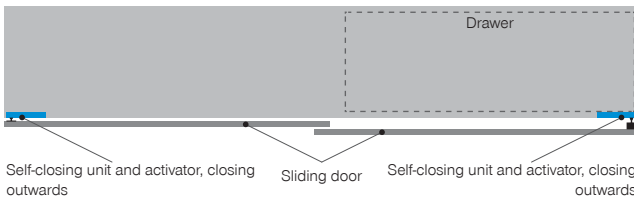


Wardrobe, closed

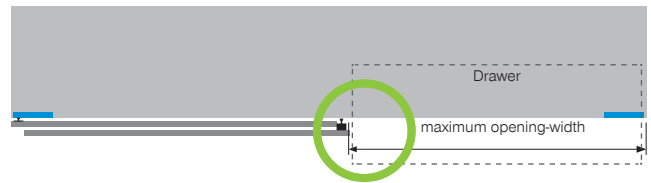

Wardrobe, open

PRODUCT RANGE SELF-CLOSING (CLOSING INWARDS / DOUBLE ACTING)

Housing length (l): 200 bis 385 mm
 Housing bright (b): 18 bis 25 mm
 Housing depth (t): 10,4 bis 18 mm
 Stroke (s): 50 bis 100 mm

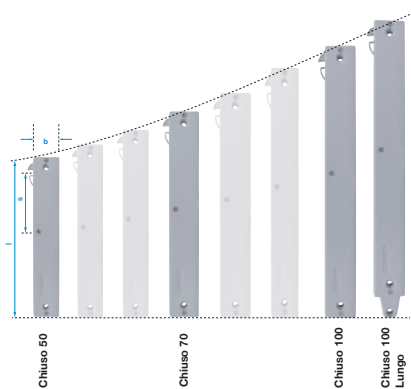


DOUBLE ACTING SELF-CLOSING UNITS

In order to dampen sliding doors within both directions double acting self closing units will be used.

The activator will be assembled at the cabinet; the self closing units on top of the sliding door.



Sliding-door, damping to the right side



Sliding-door, damping to the left side