

# VACUUM EJECTOR SERIES ZCS

## ▶ PRODUCT ADVANTAGES



### ▶ High-performance

- Volume flow: 16 l/min–40 l/min
- Air consumption: 10 l/min–20 l/min
- Max. vacuum level: -90 kPa

### ▶ Vacuum generation with integrated height compensation

The vacuum generator stands out thanks to a very fast response time in a compact design. Level compensator, silencer and generation are efficiently combined.

## ▶ PRODUCT KEY

<b>ZCS</b>	<b>10</b>	<b>21</b>	<b>L07</b>	<b>M5M</b>
Series	Vacuum cartridge type	Levels and number of vacuum cartridges	Stroke	Vacuum connection


## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	Max. vacuum level [kPa]	Volume flow [l/min]	Air consumption at 2.2 bar [l/min]	Air consumption at 4 bar [l/min]	Stroke [mm]	Weight [kg]
ZCS1021-L07-M5M	-83	16	10		7	0.047
ZCS2021-L20-1B40	-90	40	20	32	20	0.23
ZCS2021-L20-2B40	-90	40	20	32	20	0.23




# VACUUM EJECTOR SERIES ZCS

ZCS2021-20-1B40

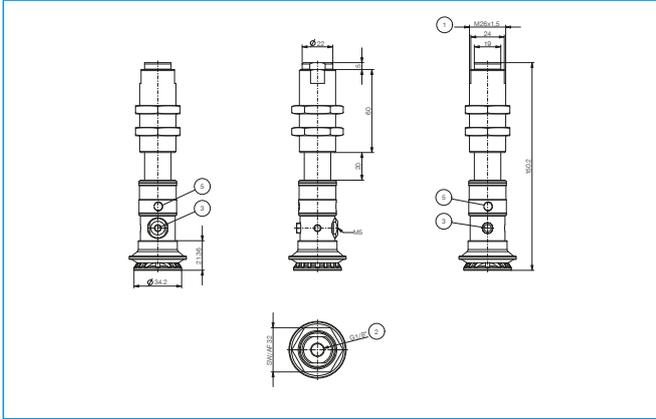

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ④ Exhaust air/exhaust air valve
- ⑤ Exhaust air/exhaust air valve

ZCS2021-20-2B40

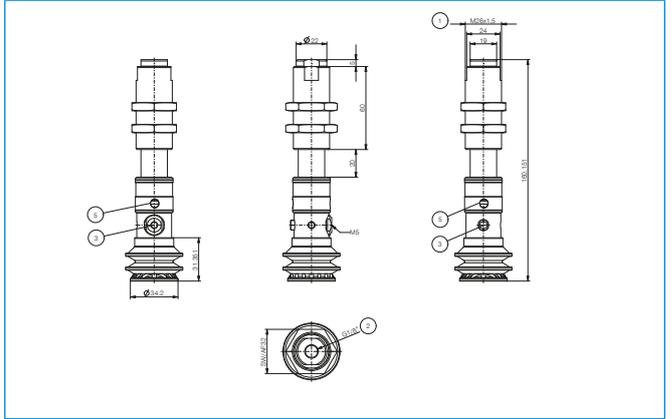

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ④ Exhaust air/exhaust air valve
- ⑤ Exhaust air/exhaust air valve