


VACUUM EJECTOR

SERIES ZKM / ZKX | INSTALLATION SIZE ZKM101 / ZKX101

▶ PRODUCT ADVANTAGES

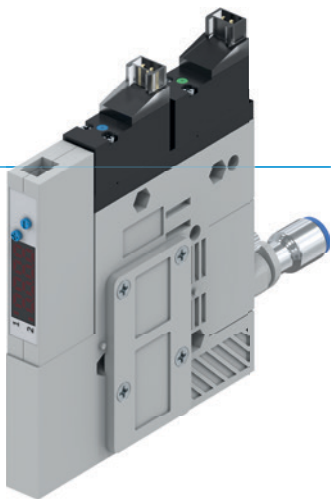

- ▶ **Compact all-in-one design**
- Vacuum generation, a silencer, a vacuum filter, air control, a blow-off function, and a vacuum switch can be combined into a single compact unit.
- ▶ **Flexible and space-saving**
- The compact design and the ability to combine multiple units allow for flexible adaptation to different applications and installation situations.
- ▶ **Reliable and durable**
- The integrated filter with a self-cleaning function, robust seals, and a design that ensures a rapid response guarantee reliable and long-lasting operation.
- ▶ **Certifications: LABS / REACH / RoHS**

▶ PRODUCT KEY

ZK	M	E	101	S	AR3	D	SP	6
Series	Increased volume flow	Air-saving function	Nozzle information	Number of generators	Air and blow-off control valve	Pneumatic connection	Digital vacuum switch	Vacuum connection

► TECHNICAL DATA



	► Technical data			
Order no.	ZKM101-S-AR3-C-SN-6	ZKM101-S-AR3-C-SP-6	ZKX101-S-AR3-C-SN-6	ZKX101-S-AR3-C-SP-6
Max. vacuum level [kPa]	-85	-85	-92	-92
Volume flow [l/min]	26	26	23	23
Digital vacuum switch	Yes	Yes	Yes	Yes
Air-saving function	No	No	No	No
Switching output	NPN	PNP	NPN	PNP
Weight [kg]	0.096	0.096	0.096	0.096
Vacuum generator type	Vacuum nozzle	Vacuum nozzle	Vacuum nozzle	Vacuum nozzle
Nozzle version	Mini	Mini	Mini	Mini
Number of nozzles	1	1	1	1
Body type	Single module	Single module	Single module	Single module
Pneumatic connection	M5 inside	M5 inside	M5 inside	M5 inside
Number of compressed air connections	1	1	1	1
Air control valve	Yes	Yes	Yes	Yes
Air control valve version	NC	NC	NC	NC
Blow-off control valve	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24
Solenoid valve	Yes	Yes	Yes	Yes
Electr. connection solenoid valve		Direct cable connection	Direct cable connection	Direct cable connection
Throttle check valve	No	No	No	No
Sealing material	NBR	NBR	NBR	NBR
Number of vacuum connections	1	1	1	1
Vacuum connection	6 mm	6 mm	6 mm	6 mm
Silencer	No	No	No	No
Vacuum filter	Yes	Yes	Yes	Yes
Vacuum filter type	PE filter	PE filter	PE filter	PE filter
Operating pressure max. [bar]	6	6	6	6
Air consumption at 6 bar [l/min]	21	21	21	21
Operating temperature [°C]	-20 ... +80	-20 ... +80	-20 ... +80	-20 ... +80
Certifications	LABS / REACH / RoHS	LABS / REACH / RoHS	LABS / REACH / RoHS	LABS / REACH / RoHS

VACUUM EJECTOR



SERIES ZKM / ZKX | INSTALLATION SIZE ZKM101 / ZKX101

▶ DIAGRAMS

ZKM101

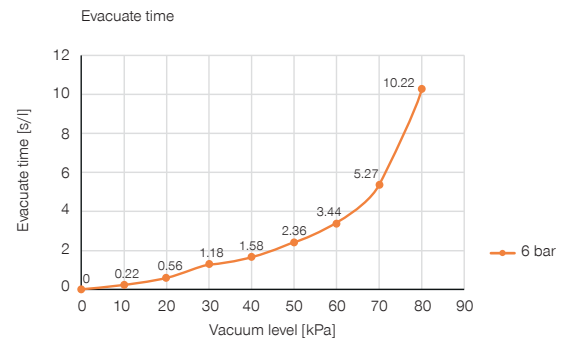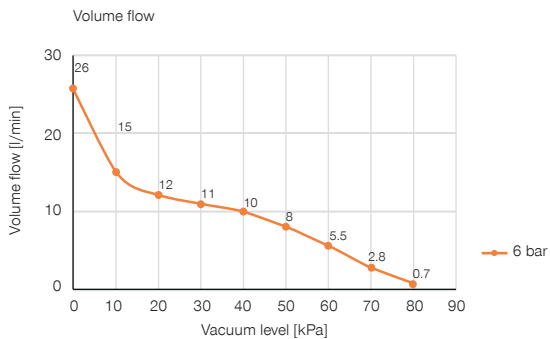


ZKX101

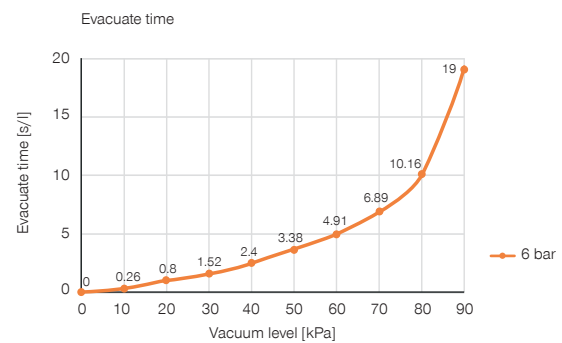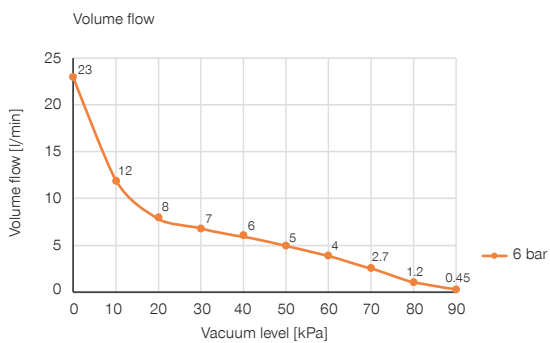

▶ TECHNICAL DRAWINGS

ZKM / ZKX101

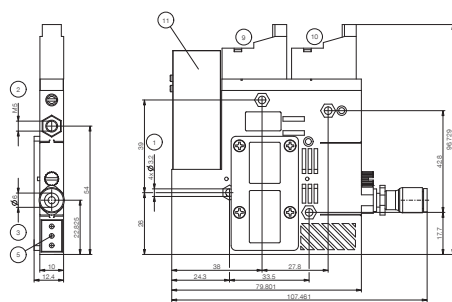

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ⑤ Exhaust air/exhaust air valve
- ⑨ Air control valve
- ⑩ Blow-off control valve
- ⑪ Vacuum switch