


VACUUM EJECTOR

SERIES ZQ

▶ PRODUCT ADVANTAGES

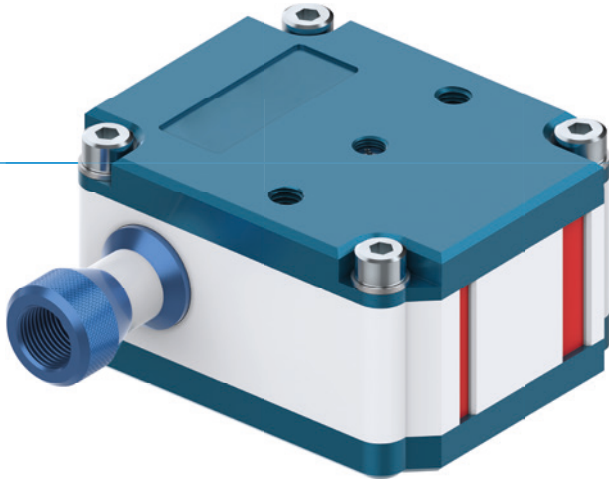

▶ High-performance

- Volume flow: 44 l/min–85 l/min
- Air consumption: 26 l/min–40 l/min
- Max. vacuum level: -90 kPa

▶ High cycle times

Efficient handling thanks to passive blow-off for fast workpiece release. Compact, energy-efficient and ideal for automated processes.

▶ Certifications: LABS / REACH / RoHS

▶ PRODUCT KEY



ZQ	20	31	S	38F
Series	Vacuum cartridge type	Levels and number of vacuum cartridges	Silencer	Vacuum connection

▶ TECHNICAL DATA



Order no.	▶ Technical data						
	Max. vacuum level [kPa]	Volume flow [l/min]	Air consumption at 4 bar [l/min]	Silencer	Vacuum filter	Operating pressure max. [bar]	Weight [kg]
ZQ2021-38F	-90	44	40	No	Yes	7	0.15
ZQ2031-S-38F	-90	85	40	Yes	Yes	7	0.16

▶ DIAGRAMS

ZQ2021

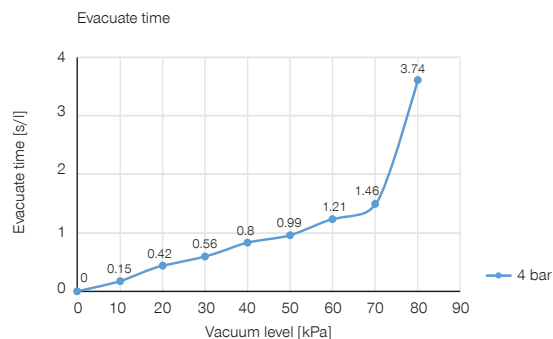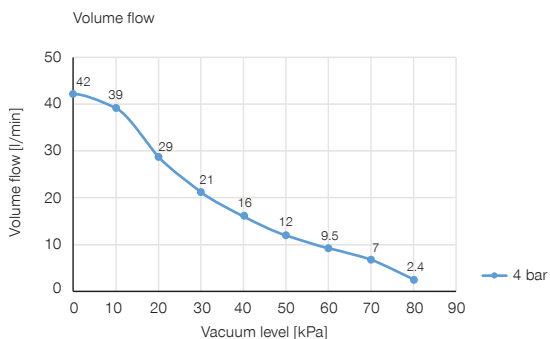


ZQ2031

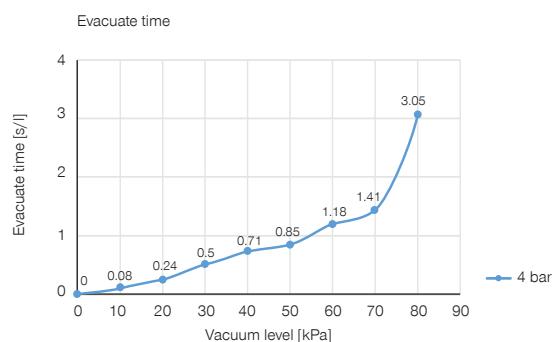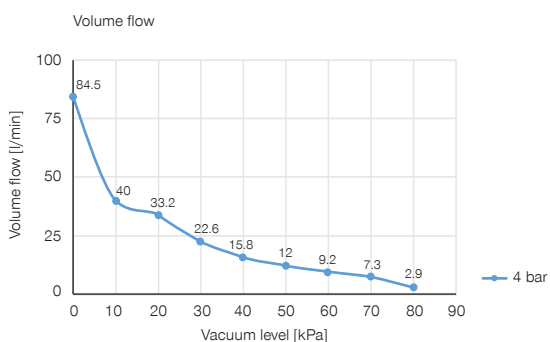


▶ TECHNICAL DRAWINGS

ZQ2021-38F

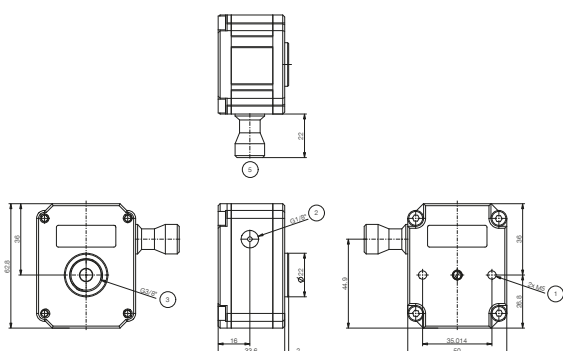

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ⑤ Exhaust air/exhaust air valve

ZQ2031-S-38F

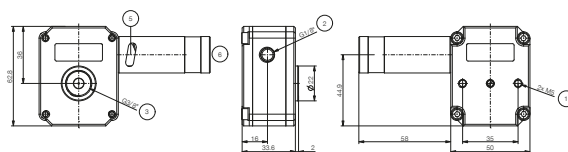

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ⑤ Exhaust air/exhaust air valve